



CONDUIT

Conduit is used to support duct sizes over 48" or smaller duct in high pressure applications. Duro Dyne offers conduit in 1/2" and 3/4" sizes in 10 ft. lengths.

- Complies with UL 797 and ANSI C80.3
- Hot Dip Galvanized Conduit



WORKS GREAT WITH:



**DYN-O-LOCS® &
D-STUD™**



**DUAL
DYN-O-CLAW™**



**ROD LOC INSERTION
MACHINE**

See reverse side for more details.

Ordering Information


Item #	Code	Description	Outside Diameter	Wall Thickness	Weight (full skid)	Length
21099	MC1210	1/2in Thin Wall Conduit - 10ft Lengths	0.706"	0.042"	1,430 lbs.	10'
21100	MC3410	3/4in Thin Wall Conduit - 10ft Lengths	0.922"	0.049"	2,175 lbs.	10'

Duro Dyne East Division, Bay Shore, NY **631-249-9000** **Fax: 631-249-8346**
Duro Dyne Midwest Division, Hamilton, OH **513-870-6000** **Fax: 513-870-6005**
Duro Dyne West Division, Fontana, CA **562-926-1774** **Fax: 562-926-5778**
Duro Dyne Canada, Lachine, Quebec, Canada **514-422-9760** **Fax: 514-636-0328**
www.durodyne.com **E-mail: durodyne@durodyne.com**

**DURO
DYNE**
 © Duro Dyne Corp.
 Printed in USA 12/18
 BF013423

DYN-O-LOCS® & D-STUD™


Dyn-O-Locs insert into the hollow ends of conduit to provide a means of attaching the conduit to the duct. The D-Stud is a Dyn-O-Loc with the threaded stud pre-attached. We recommend using a D-Stud on one end of conduit and a standard Dyn-O-Loc on the other for easy insertion and alignment of conduit in the duct work.

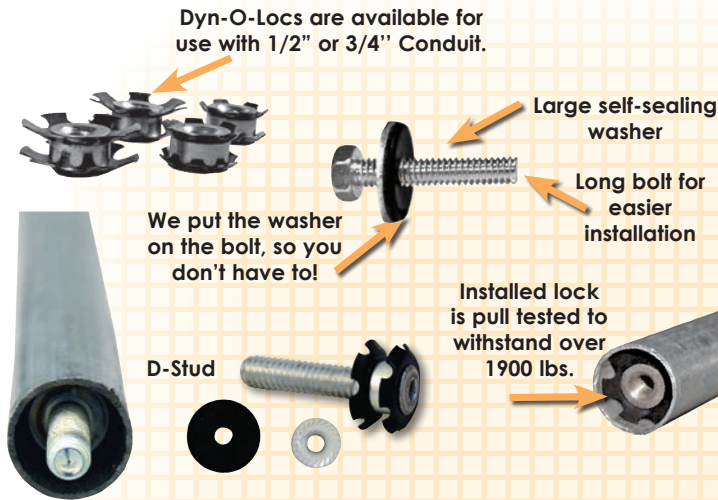

Item #	Code	Description	Quantity
21097	DOMRL12	1/2" Dyn-O-Loc*	250/Box
21098	DOMRL34	3/4" Dyn-O-Loc*	250/Box
21208	DOMRL12-100	1/2" Dyn-O-Loc	100/Box
21209	DOMRL34-100	3/4" Dyn-O-Loc	100/Box
13021	DS12K-250	1/2" Dyn-O-Loc D-Stud™ Kit	250/Box
13023	DS34K-250	3/4" Dyn-O-Loc D-Stud™ Kit	250/Box
13025	DS12-250	1/2" Dyn-O-Loc D-Stud™ Only	250/Box
13027	DS34-250	3/4" Dyn-O-Loc D-Stud™ Only	250/Box
13029	DSGW-250	Dyn-O-Loc D-Stud™ Gasket Washer	250/Box
13031	DSFN-250	Dyn-O-Loc D-Stud™ Flange Nut	250/Box

*Dyn-O-Locs included with Rod Loc Insertion Machine.

DUAL DYN-O-CLAW™

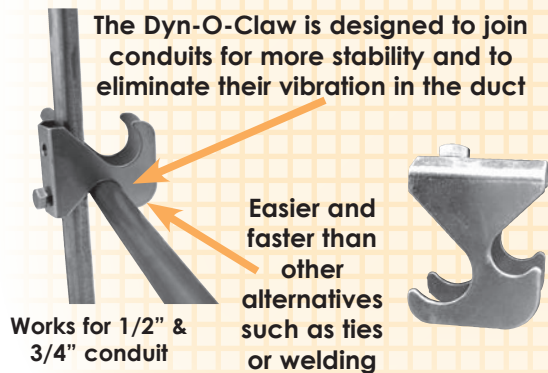


The Dual DynO-Claw is designed to join conduits and eliminate their vibration in the duct. Dual Dyn-O-Claws are easier and faster than other alternatives such as ties or welding, and work on both 1/2" and 3/4" conduit.

Item #	Code	Description	Pkg.	Weight (lbs.)
21298	DOMDOC1234	Dual Dyn-O-Claw 1/2" & 3/4"	250/Box	40

ROD LOC INSERTION MACHINE

The Rod-Loc Insertion Machine offers contractors a fast and convenient way to set up rod locks and conduit. It runs off of a standard 110 volt outlet and a 70 PSI minimum air supply. Simply place either 3/4" or 1/2" conduit in the cradle and a rod loc on each side, and by the flip of a switch the air cylinder inserts a rod lock on both ends simultaneously of hollow conduit at the perfect inset spacing, eliminating the old timely hammer in method!

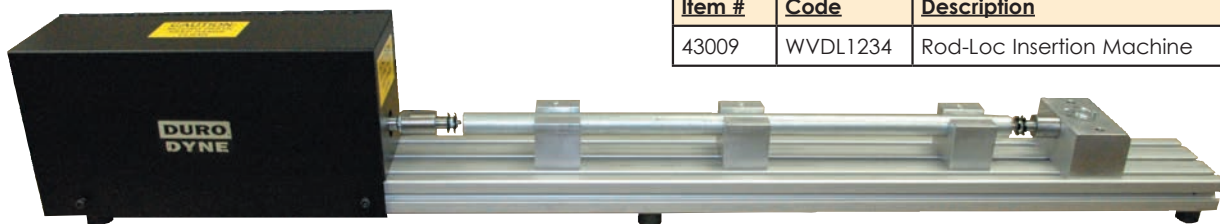

Item #	Code	Description
43009	WVDL1234	Rod-Loc Insertion Machine

Not shown: includes 48" long extension to accommodate up to 6' conduit

Duro Dyne East Division, Bay Shore, NY 631-249-9000 Fax: 631-249-8346
Duro Dyne Midwest Division, Hamilton, OH 513-870-6000 Fax: 513-870-6005
Duro Dyne West Division, Fontana, CA 562-926-1774 Fax: 562-926-5778
Duro Dyne Canada, Lachine, Quebec, Canada 514-422-9760 Fax: 514-636-0328
www.durodyne.com E-mail: durodyne@durodyne.com

DURO DYNE®
 © Duro Dyne Corp.
 Printed in USA 12/18
 BF013423