

SPECIFICATIONS

GLT Tempmat is non-corrosive, non-combustible, non-alkaline and chemically stable. Its excellent heat resistance, flexibility and low thermal conductivity make Tempmat an effective low-cost replacement for asbestos mats, millboard refractory paper and other similar products.

The transition from asbestos to glass fibers has resulted in an increasingly wide range of application for Tempmat, rather than organically bonded glass fiber insulating blanket. A 100% "E" fiberglass mat, Tempmat is manufactured in web form and mechanically needled together to form thicknesses of ¼", ½" and 1". There are no binders in Tempmat. Instead, long textile fibers have been accurately chopped to provide maximum density, high insulation and strong physical properties in temperatures up to 1200°F.



**GLT Tempmat meets the following requirements of commercial and government specifications:**

MIL-1-24244	Compliance with government specifications
MIL-1-16411, Type II	U.S. Coast Guard incombustible materials, USCG 164-009

GLT Tempmat is being used to solve increasingly complex applications in oil refineries, steam and gas turbines, exhaust systems on diesel tug, tankers, Coast Guard and Navy vessels, and pleasure yachts. It is used to relieve stress at welding points and on valve flange covers. In addition, Tempmat acts as an insulator over automotive thermactor switches, for floor pans over catalytic converters and in luggage compartments. In nuclear power plants, these blankets reduce labor costs during removal for inspection and service, and cut re-insulation costs associated with poor fitting rigid block.

**Physical Properties of GLT Tempmat**

	Thickness (in.)	Mass (density lbs./cu. ft.)	Width (in.)	Roll Length (ft.)	Surface Area (sq. ft./roll)	Approx. Roll Weight (net lbs.)
Style #1006	¼"	9 to 11	60	150	750	188
Style #1050	½"	9 to 11	60	75	375	188
Style #1031	1"	9 to 11	60	45	225	225

**Note:** Width and roll length can be made to order. All values above are nominal values.

**Acoustical Performance**

Thickness (in.)	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
¼"	.05	.10	.20	.45	.75	.85	.30
½"	.05	.10	.35	.75	.95	.90	.35
1"	.10	.30	.85	1.00	1.00	1.00	.60


## Physical Properties

Service Temperature..... Up to 1200°F  
 Fire Resistance ..... Incombustible  
 Density (Approximate)..... 9 - 11 lbs./cu. ft.  
 Moisture Absorption..... Negligible

### Thermal Conductivity ("K" value at 9.1 lbs./cu. ft.):

Mean Temperature	"K"–btu/sq. ft./hr./°F/in.
300°F	0.40
500°F	0.50
700°F	0.65

### Glass Filament Tensiles (at various temperatures)

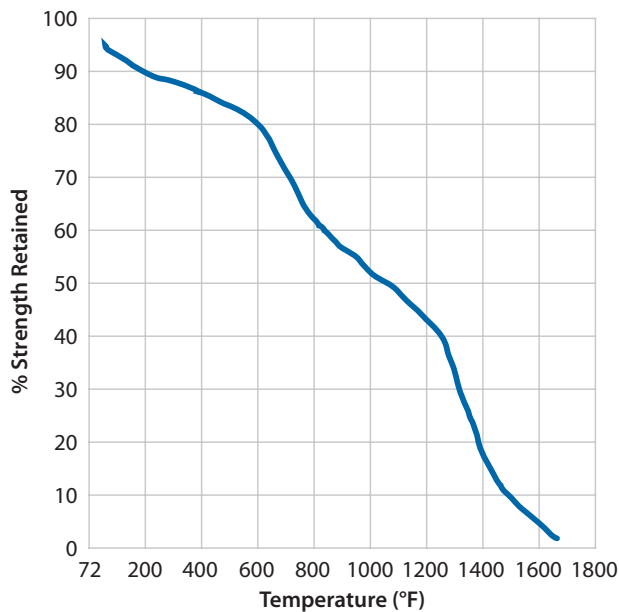

## Properties of Fiberglass "E" Glass

### Physical/Mechanical Properties of Glass Fibers

Specific Gravity..... 2.60 grams/cc.  
 Density ..... 0.094 lbs./cu. in.  
 Tensile Strength (PSI×10<sup>3</sup> @ 70°F)..... 500 lbs.  
 Modulus of Elasticity (PSI×10 @ 72°F)..... 10.5 lbs.  
 After Heating (PSI×10 @ 1000°F)..... 11.8 lbs.  
 Elongation (@ 72°F)..... 4.8%

### Thermal Properties of Bulk Glass

Softening Point..... 1500°F  
 Strain Point..... 1100°F  
 Annealing Point ..... 1200°F

### Electrical Properties of Bulk Glass

Dielectric Constant  
 1 MHz @ 72°F..... 6.33  
 10kHz @ 72°F..... 6.13  
 Power Factor  
 1MHz @ 72°F ..... 0.001  
 10kHz @ 72°F..... 0.0039

**Note:** The physical and performance properties cited in this literature have been derived in tests conducted by various fiber companies.

Tests have been conducted on both fiber and fabrics woven with bulked glass fiber.

Reference to U.S. Government specification values as well as information provided on certain end uses which currently use bulked glass are presented for the information of potential customers in determining the potential suitability of these products for their own applications. No claims are made as to the accuracy or applicability of the test methods employed or the results derived therefrom.

**Important Cautionary Note:** Items of protective equipment manufactured from fiberglass fabrics such as aprons, gloves, mittens, etc. should be labeled to show the maximum short-term and continuous-exposure temperature limits established in accordance with the standard specifications applicable to the item of equipment being offered.

For more information on GLT Products, please call toll-free at 800.874.1748 or visit us online at www.gltproducts.com.



#### HEADQUARTERS:

6810 Cochran Road | Solon OH 44139 | 440.914.1122 | 440.914.1133 Fax | **1.800.874.1748**

#### DISTRIBUTION CENTERS:

**Ohio:** 6810 Cochran Road | Solon OH 44139 | 440.914.1122  
**Texas:** 2902 East 13th Street, Suite 200 | La Porte, TX 77571 | 713-670-9700  
**North Carolina:** 501 West Camel Street | Greensboro, NC 27401 | 1.800.551.9760  
**California:** 4113 Gold River Lane | Stockton, CA 95215 | 1.800.833.4500