


**Acoustical Pipe and Duct Wrap:
B-10 Lag**

A flexible one-pound per square foot reinforced-foil-faced loaded vinyl noise barrier used to wrap noisy pipes, ducts, valves and fans housings.

- Standard roll sizes is 54" x 30'L
- Easy to cut, wrap and install with matching lag tape

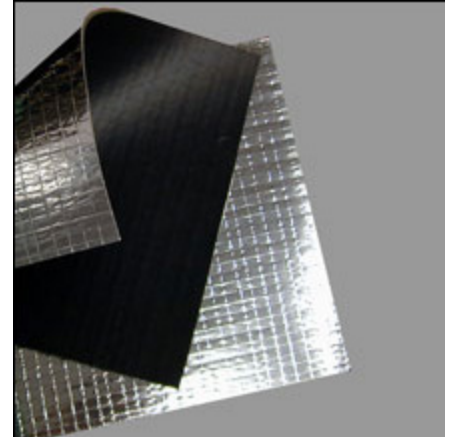

Applications:

Typically used to wrap noisy pipes and ducts to block the noise that transmits through the walls of the pipe or duct as air or other contents move through it. The reinforced foil exterior readily accepts a matching lag tape for easy installation. Also available with a 1" or 2" thick quilted fiberglass decoupler.

Product Data:

Description	1 lb. psf reinforced foil faced vinyl barrier
Nominal thickness	.090 inches
Standard width	54" wide
Roll length	30 feet
Weight	1.0 lb. psf
Temperature Range	-10° to +180° F
Flammability	UL 94: meets VO FMVSS 302: Pass

Acoustical Performance:

Sound Transmission Loss Per Octave Band Frequency

Product	OCTAVE BAND FREQUENCIES (Hz)						STC
	125	250	500	1000	2000	4000	
B-10 Lag	15	18	22	27	32	37	27

ASTM E-90 & E 413