



**AEROFLEX®**

Protective/Decorative Coating for EPDM Insulation


## **Aerocoat™**

Premium Acrylic Emulsion Coating  
for Aerocel® EPDM Insulation





## Aeroflex insulation system solutions

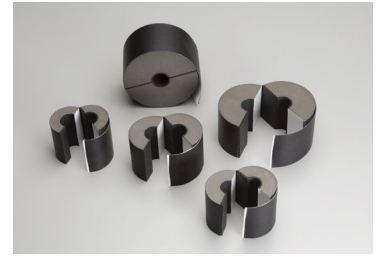


### Aerofix®

Light-weight, rigid pipe supports, pre-insulated with closed-cell EPDM foam rubber and encased with zero-perm EPDM polymer membrane. Includes built-in pressure sensitive Protape closure system.



### Aeroflex Adhesives

Specially formulated adhesives for bonding and vapor-sealing Aerocel insulation. Fast tack and LVOC formulations available.

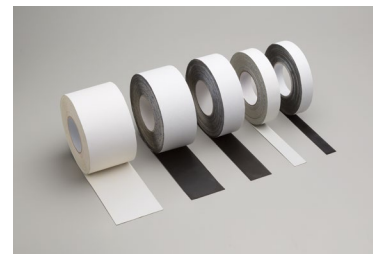

### Protape®

Zero-perm EPDM-based, self-adhering rubber tape for sealing glued insulation seams and termination points.

# Aerocoat™

## Premium Pure Acrylic Emulsion Coating

HVAC | Refrigeration | VRF | Chilled Water  
Ductwrap | Hot & Cold-Water Piping

Low-VOC emissions, 100% pure acrylic emulsion, water-based latex coating for Aerocel® EPDM insulation. Provides a decorative finish on interior installations, UV protection and code compliance for exterior applications.

U.S. energy codes require mandatory shielding of pipe insulation in exterior environments. Coatings such as Aerocoat are acceptable; adhesive tapes alone are not.

Availability: 1-gallon containers (White)

### Fast, simple to install

Ready to apply right out of the container (no diluting or tinting recommended)

Two coats required to achieve 100% coverage

### Superior performance

Protects Aerocel® insulation from environmental factors such as solar radiation, moisture, wind, equipment maintenance

400% Elongation - Coating will expand and contract with insulation

White coating reflects solar radiation

Prolongs product life

### Safe for indoor & outdoor environments

Water-based formula

Low-VOC emissions

Complies with LEED® low-VOC emission requirements for interior- and exterior-applied products

Verified Environmental Product Declarations (EPD)

**Product:** White, 100% pure acrylic emulsion, water-based latex coating specially formulated to protect Aerocel insulation for interior or exterior applications.

**Application:** If Aeroseal or Aeroseal LVOC™ Black adhesive was dry to the touch prior to contact, Aerocoat may be applied immediately after installation. For Aerocel REF 1520™ adhesive, refer to data sheet for required dry times. Before applying make sure insulation surfaces are clean and free from oil, grease, dust or loose portions of any previous coating. Stir Aerocoat thoroughly and apply with brush or roller to the clean surface. No primer is required. Apply 2 coats allowing a minimum of 4 hours drying time (75°F, 70% RH) before applying second coat. Dilution or tinting of coating is not recommended due to negative impact on product performance. Recommended application ambient temperature is 50°F (10°C) or higher. Full cure time is 24 hours.

**Clean Up:** Clean Water

**Physical Properties**

Composition	Acrylic emulsion coating (100%)
Solids Content	Approximately 50% by weight
Net Weight	10 lbs/gal
Appearance	Semi-Gloss
VOC Content	116.2 g/L
UV Resistance	Excellent
Fungi Resistance	Excellent
Flammability	Non-flammable
Coverage	Up to 400 ft2/gal
Application	Brush or roller
Dry Time	Minimum of 4 hours between coats (75°F, 70% RH)
Reapply	3-5 years
Shelf Life	1 year (store at room temperature, avoid freezing)

**Additional Approvals, Compliances, Etc.**

ANSI/ASHRAE/IES Standard 90.1	Energy Standard for Buildings Except Low-Rise Residential Buildings
IECC®	International Energy Conservation Code®
ANSI/ASHRAE/ICC/USGBC/IES Standard 189.1	International Green Construction Code® (igCC®)
CA Title 24	California Building Energy Efficiency Standards
MEA #171-04-M	City of New York Material and Acceptance Pipe Insulation
CDPH Standard Method v1.2	Low Emitting Materials, Interior Paints & Coatings

**Potential LEED® Credit Contributions**

Energy & Atmosphere (EA)	Prerequisite: Minimum Energy Performance Credit: Optimize Energy Performance
Materials & Resources (MR)	Credit: Building Product Disclosure and Optimization - Environmental Product Declarations (EPD), Product Specific Type III
Indoor Environmental Quality (EQ)	Credit: Low-Emitting Materials Credit: Indoor Air Quality Assessment Credit: Thermal Comfort Credit: Acoustic Performance
Innovation (IN)	Credit: Occupant Comfort Survey

Find us in





282 Industrial Park Road Sweetwater, TN 37874  
423.337.2493 Fax: 423.337.7675 Toll Free: 866.AEROCEL  
[www.aeroflexusa.com](http://www.aeroflexusa.com)

101121